


Mito sfera su 60 datasheet

Ring-shaped LED wall luminaire with single-sided light output for mounting on a mirror and a diameter of 60 cm. The lighting effect provides glare-free light for perfect illumination. This version features an external power supply unit behind the mirror or in recess and connects to 230 VAC mains voltage.

The luminaire can be controlled using »touchless control« (gesture control at the head) or Occhio air, or can be dimmed using a trailing-edge phase cut dimmer*. The color temperature is continuously adjustable between 2700–4000 K or can be preset (2700/3000/3500/4000 K) using »touchless control« or Occhio air.

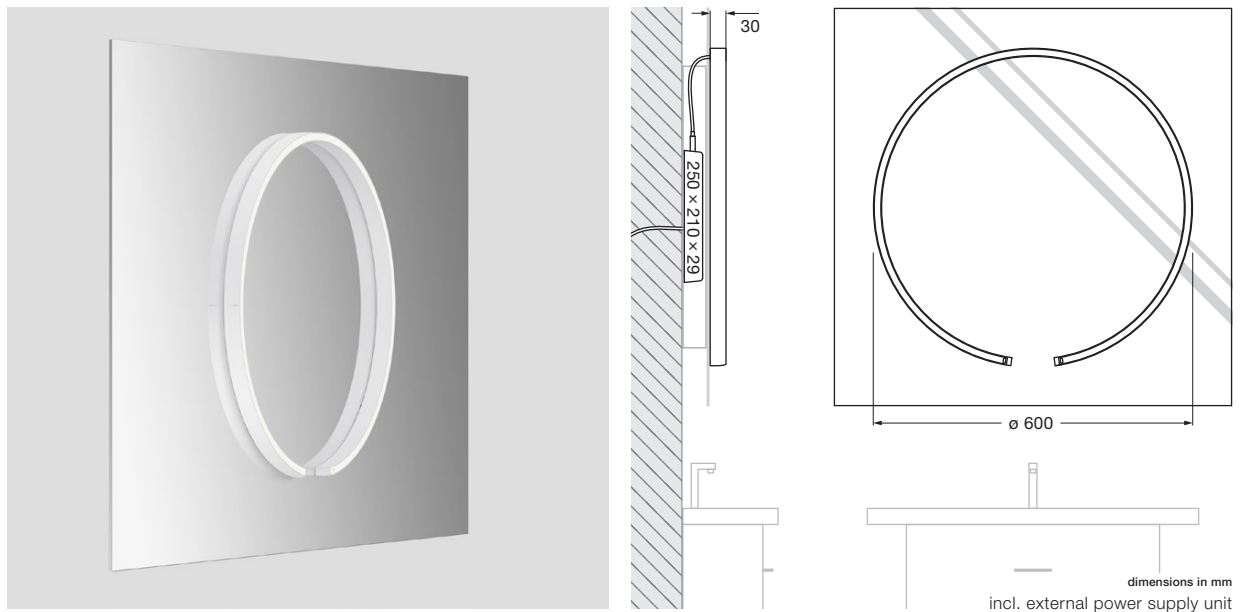

technical data Mito sfera su 60

| | | |
|-------------|--------------------------------|--|
| properties | material | aluminium painted or PVD-coated, optical silicone |
| | weight (without mirror) | 2.5 kg |
| surface | head | bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom |
| | Occhio »color tune« LED | |
| | average life time | > 50.000 hrs |
| | energy efficiency class | A+ |
| | power | 40 W (incl. external Occhio power supply unit approx. 46 W) |
| | color rendering index | high color; CRI Ra 95 |
| | color temperature | 2700–4000 K |
| electricity | recommended use | residential and commercial |
| | dimming | via trailing-edge phasecut dimmer, »touchless control« or Occhio air (optional)* |
| | connection | 230 V AC |
| | permitted operating conditions | max. 30°C for indoor use only |


* For a list of compatible dimmers, see www.occhio.de/dim_en, trailing-edge phasecut dimmer and Occhio air not combinable



Mito sfera su 60 connection diagram


Option 1

power supply unit behind the mirror, length of the luminaire cable 1.2 m


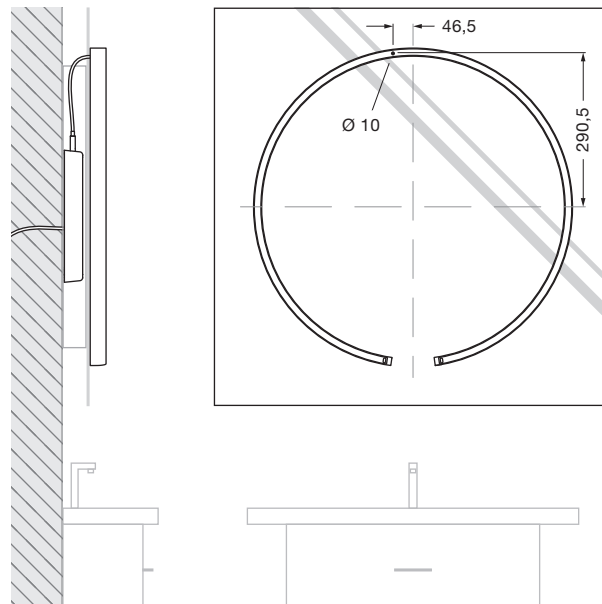


Option 2

Power supply unit in revision, optional extension cable (5 m) can be ordered via configurator

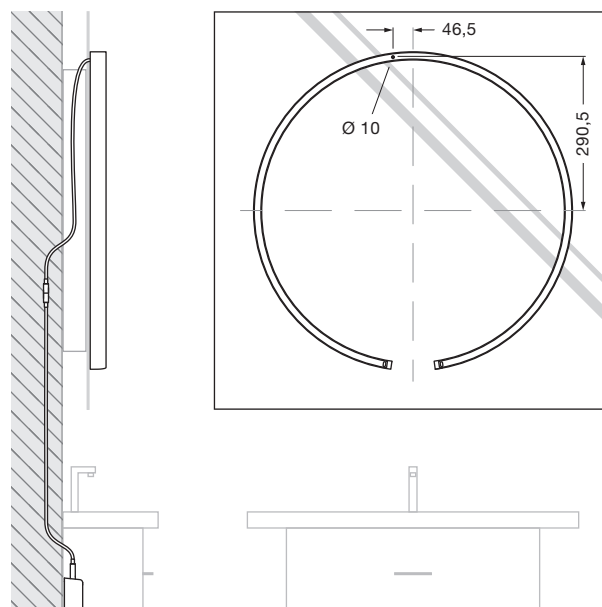

Mito sfera su 60 lighting effects

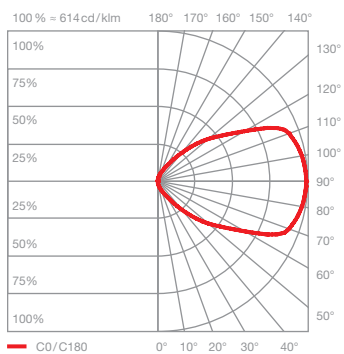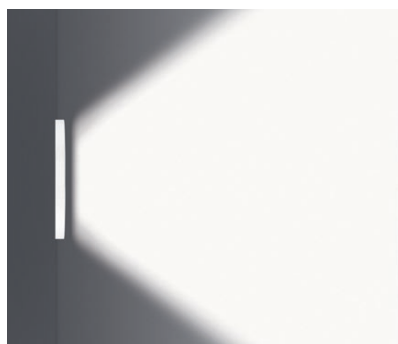

wide

wide-radiation light, beam angle approx. 90°

inserts: wide

luminous flux: high color 40 W 1600 lm


UGR (4H8H) > 19*

*The standardized indication of glare values (UGR value - 4H8H) is not quite significant for annular luminaires. In most real applications the result of an individual calculation is a UGR value <19. Therefore, we recommend to carry out a calculation which can be prepared by our lighting design team (project-support@occhio.de).

control options

Control

Mito set box (standard)



sospeso / volo



soffitto / alto flat



sfera / sfera su



alto & alto side

sospeso / volo / sfera / sfera su:

COLOR (Sensor off)
adjustable color temperature (4 steps)
trailing-edge phase cut dimming possible

STEP (sospeso / volo)

adjustable color temperature (4 steps)
adjustable up / downlight ratio (5 steps)
trailing-edge phase cut dimming possible

PRESET (sfera / sfera su)

color temperature adjustable (4 stages)
light intensity adjustable (5 stages)

SENSOR

»touchless control« (gesture control)
switching, dimming, up / down fading
»color tune« (color temperature continuously adjustable)
no external dimming possible


alto / alto side:

COLOR
adjustable color temperature (4 steps)
trailing-edge phase cut dimming possible

Mito »air« box (optional)



sospeso / volo /
sfera / sfera su



alto & alto side



Occhio air (Bluetooth control using Occhio air app) or air controller (optional) control of individual luminaires, groups and scenes

sospeso / volo / sfera / sfera su:

SENSOR

»air« + »touchless control« (Bluetooth- and gesture control)
control via »touchless control« and Occhio air app or »air« controller

SENSOR OFF

»air«
control via Occhio air App or »air« controller
switching, dimming, up / down fading
»color tune« (color temperature continuously adjustable)

terra / terra 3d / terra table top:

»air«, »touchless control« and »body sensor« (Bluetooth- and gesture control)
control via »touchless control«, »body sensor« and Occhio air App or »air« controller

»ambient light control«
adjustment to ambient light

»presence sensor«
presence identification and automatically shutdown by presence sensor

deactivation and adjustable via control and sensor with »air« app

alto / alto slide

»air« (Bluetooth - control)
control via Occhio air App or »air« controller
switching, dimming
»color tune« (color temperature continuously adjustable)

with Mito »air« box no external dimming possible



terra / terra 3d
terra table top /
soffitto / alto flat