



WEVER & DUCRÉ
LIGHTING

MILES 12.0

317374B3

Project
Type
Notes
Quantity
Date

GENERAL

Wall
 Surface
 Jet Black
 IP20
 Interior
 1750 lm
 9005^a

LED

2700 K
 CRI 90
 L70 / 50000 h
 3-step binning




PHYSICAL

Length 1200 mm
 Width 26 mm
 Height 80 mm
 2.6 kg


ELECTRICAL

incl. PS | phase-cut dim
 220 - 240 V
 Total connected power 41 W
 PC1
 Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.

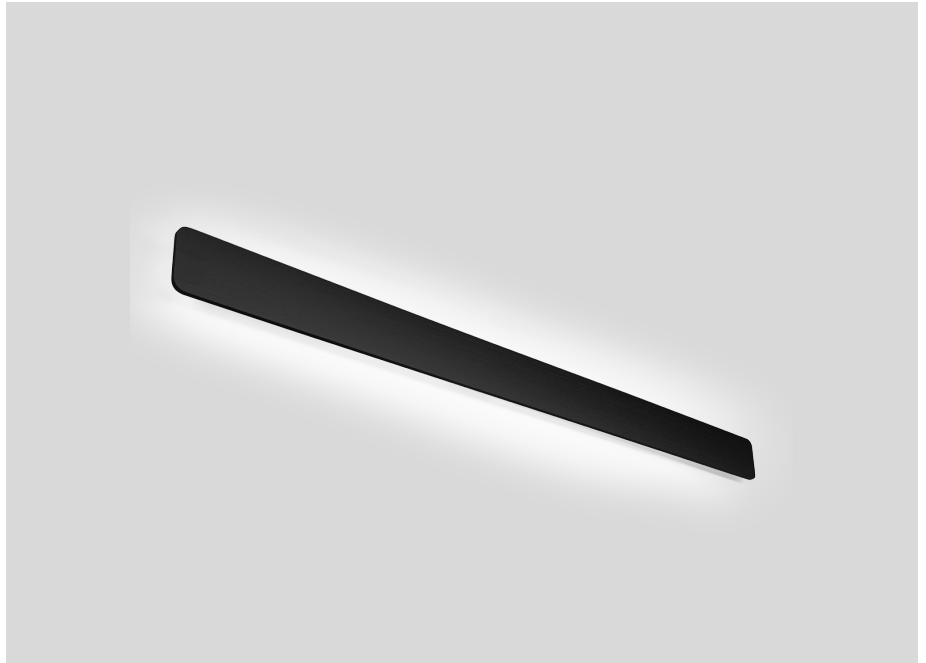

LIGHT DISTRIBUTION



[317374B3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for December 15, 2020 the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

MILES

12.0

317374B3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.94	0.88	0.82	0.77	0.72
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.